


Non-Magnetic 2 litre Rebreather Cylinder

Designed and certified for marine SCUBA use

FEATURES

- Designed specifically for military use in marine and rebreather applications
- CE and PI marked
- Core is SS 904L, a non-magnetic ultra-performance stainless steel
- 15 year operating life with extended temperature range of -50°C to +60°C
- Lightweight: lighter than aluminium a 2L core cylinder due to higher strength core
- Safe: Retains structural integrity even when pierced under full working pressure
- Available in green body and black body colour, for Oxygen or Dive Gases (O2, NITROX, HELIOX)

Description

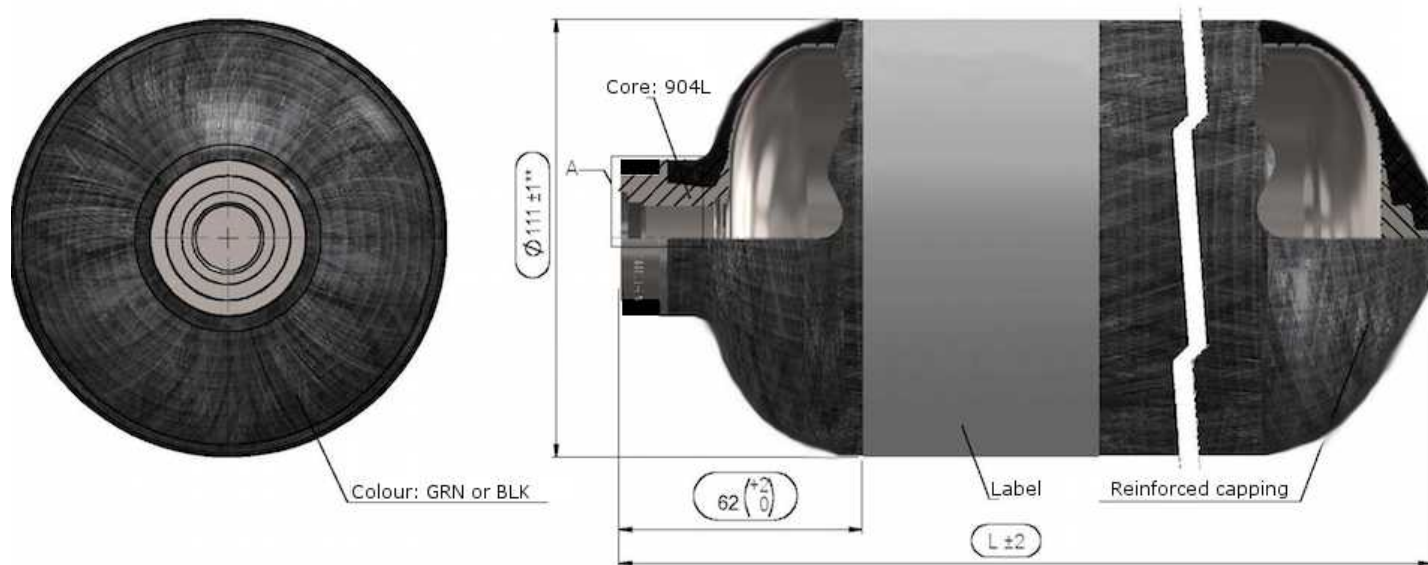

Labelling of GREEN colour cylinders for Oxygen use

<p>* REFER TO USER MANUAL FOR OPERATION AND MAINTENANCE.</p> <p>* FILL ONLY WITH PURE OXYGEN (O2).</p> <p>* TEST FOR FRACTION OF O2 BEFORE USE.</p> <p>* NO SILICONES: USE O2 LUBRICANT ONLY.</p> <p>* CYLINDER VALVE TORQUE SETTINGS TO BE IN ACCORD WITH EN ISO 13341.</p>			<p>OXYGEN O2</p> <p>Öxy</p> <p>Sauerstoff</p> <p>Oxygène</p> <p>Кислород</p> <p>أكسیجن</p> <p>CLASS 2: 10</p> <p>UN-Nr. 1072</p>	<p>COMPOSITE CYLINDER 2.0L 300 BAR FOR SCUBA USE</p> <p>EN12245 PS/PW 300BAR</p> <p>PT/PH 450BAR</p> <p>TS -50°C/+60°C</p> <p>M18x1.5</p>	<p>NON-MAGNETIC</p> <p>KEEP FROM CONTACT WITH MAGNETISING MATERIALS</p> <p>SS 904L CORE</p> <p>2.0L 1.2KG</p>	<p>Open Safety Equipment Ltd</p> <p>www.opensafety.eu</p> <p>Model: Inc-O2CYL-2L300NM</p> <p>Serial Number: AAABBBCCC</p> <p>Manufactured: 2018/03</p> <p>Inspected: 2018/03</p> <p>Next Inspection: 2033/03</p> <p>Replace by: 2033/03</p>

Labelling of BLACK colour cylinders for O2 / NITROX / HELIOX use

<p>* REFER TO USER MANUAL FOR OPERATION AND MAINTENANCE.</p> <p>* FILL ONLY WITH O2 / NITROX / HELIOX.</p> <p>* TEST FOR FRACTION OF O2 BEFORE USE.</p> <p>* NO SILICONES: USE O2 LUBRICANT ONLY.</p> <p>* CYLINDER VALVE TORQUE SETTINGS TO BE IN ACCORD WITH EN ISO 13341.</p>			<p>DIVER GAS OXYGEN (O2) / NITROX / HELIOX</p> <p>MOD: _____</p> <p>FO2: _____ % OXYGEN</p> <p>CLASS 2: 10</p> <p>UN-NR 1072</p>	<p>COMPOSITE CYLINDER 2.0L 300 BAR FOR SCUBA USE</p> <p>EN12245 PS/PW 300BAR</p> <p>PT/PH 450BAR</p> <p>TS -50°C/+60°C</p> <p>M18x1.5</p>	<p>NON-MAGNETIC</p> <p>KEEP FROM CONTACT WITH MAGNETISING MATERIALS</p> <p>SS 904L CORE</p> <p>2.0L 1.2KG</p>	<p>Open Safety Equipment Ltd</p> <p>www.opensafety.eu</p> <p>Model: Inc-SCRCYL-2L300NM</p> <p>Serial Number: AAABBBCCC</p> <p>Manufactured: 2018/03</p> <p>Inspected: 2018/03</p> <p>Next Inspection: 2033/03</p> <p>Replace by: 2033/03</p>

Water Capacity: 2 litres
 Working Pressure: 300 bar
 Test Pressure: 450 bar
 Weight: 1.2kg
 Length (L): 318.5mm ±2mm
 Diameter: 111mm ±1mm
 Cylinder Thread: M18x1.5 to EN144-3
 Certification: EN12245, with CE and PI marking
 Magnetic Signature: Non-magnetic to STANAG 2897 Class A
 Life: 15 years from date of first fill
 Construction: SS904L core with carbon fibre wrap and varnish
 Designed and Manufactured in Europe (EU)

Exclusive Distributor

Northern Diver International Ltd, East Quarry, Appley Lane North, Appley Bridge, Lancashire, WN6 9AE, UK
 Contact Mel Simm - office +44(0) 1257 25 69 36, mobile +44(0)7877 693 876, email mel@ndiver.com
 Visit our website www.ndiver-military.com



OPEN SAFETY